

R12IB3S-GSM2(HB)

12.1" Intel® Celeron® N2930 G-WIN GS-Series Full IP65 PCAP Panel PC



KEY FEATURES

- 12.1" 1024 x 768 Resolution with Projected Capacitive Multi-Touch (P-CAP)
- Intel® Celeron® Bay Trail-M N2930 1.83 GHz
- Fanless cooling system and ultra-low power consumption
- Edge-to-edge design
- Full IP65 design with Special M12 Waterproof connectors
- 1 x LAN, 1 x RS232, 1 x USB 2.0



SPECIFICATIONS

| Display | | | |
|----------------------------|--|------------------------------|--|
| Touch / Glass | Projected Capacitive Multi Touch Screen Protection Glass (Optional) | Resolution | 1024x768 |
| Size | 12.1 inches | Contrast Ratio | 1000:1 |
| Panel Brightness | 500 nits 1000 nits(Optional) | View Angles | 89,89,89,89 |
| Active Area | 245.76 x 184.32 mm | | |
| System Specification | | | |
| Processor | Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz) | Memory | 1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional) |
| Storage | 1 x mSATA SSD 64GB. mSATA SSD up to 512GB. (Optional) | Ethernet controller | 2 x Intel® Ethernet Controller I210-AT |
| Operating System | Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional) | WLAN | Support (Optional) |
| BT | Support (Optional) | | |
| Environment | | | |
| Operating Humidity | 10% to 95% RH | Operating Temperature | -15 °C to 55 °C |
| Storage Temperature | -30°C to 60°C | Shock | 40g for 11ms |
| Vibration | 1.48/1.90/2.24 g rms for XYZ/ 5-500Hz | IP rating | Full IP65 |
| Certification | | | |
| Certification | Compliant with MIL-STD-810F/G for vibration / shock, CE, FCC | | |
| IO Ports | | | |
| USB Port | 1 x USB 2.0 (M12 type) | Serial Port | 1 x RS232 (M12 type)(Optional 422/485) |
| LAN | 1 x LAN-10/100/1000 (M12 type) | Indicator | LED Indicators: Power, Storage |
| Mechanical | | | |
| Dimension | 296.2 x 226.7 x 45.5 mm | Mounting | VESA Mount/ Panel Mount |
| Enclosure | Aluminum | Cooling System | Fanless Design |
| Power | | | |

Power Rating 9-36V DC (M12 type)


Accessory

Accessory Quick Start Guide (Hardcopy)
Driver CD & User Manual
M12 Power Cable
M12 Serial Interface Cable
M12 USB/ LAN Cable
I/O Protective Cap x 3

Control

Button 1 x Power Button
1 x Reset Button

DIMENSIONS UNIT:MM

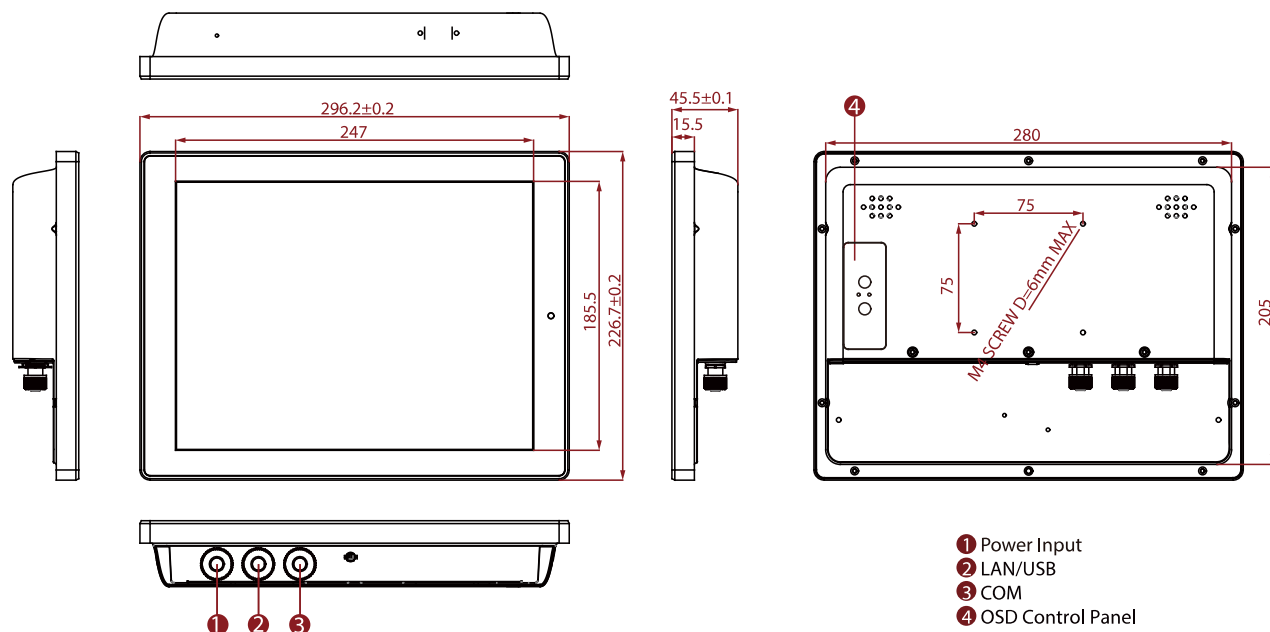

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.