

R15L100-STC3

15" Stainless Panel Mount Display



KEY FEATURES

- 15", 1024 x 768
- VGA and HDMI input
- Panel mount
- VESA mount
- Stainless housing SUS 316 / AISI 316




SPECIFICATIONS

Display	
Resolution	1024x768
Contrast Ratio	2000:1
Display Color	16.2M Colors
Active Area	304.1x228.1 mm
Size	15 inches
Panel Brightness	300 nits
View Angles	88,88,88,88
Touch / Glass	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
Mechanical	
Dimension	396 x 316 x 56.8 mm
Enclosure	Stainless front bezel
Mounting	Panel mount VESA Mount
Cooling System	Fanless design
Environment	
Operating Humidity	10% to 90% (non-condensing)
Storage Temperature	-20~60°C
Operating Temperature	0~50°C
IP rating	Front IP65
Certification	
Certification	CE, FCC
IO Ports	
Power Input	1 x 12V DC, 2.5φ DC jack
Serial Port	1 x RS232 D-sub9 for touch screen control (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status
USB Port	1x USB type-A for touch screen control (Optional)
Video	1x VGA input 1x HDMI input (Optional) 1x DVI input (Optional)
Accessory	
Accessory	100~240V AC to DC Adapter Power Cord External USB Cable For Touchscreen Control External VGA Cable External HDMI Cable Driver CD & Manual VESA Screws
Optional Accessory	External DVI Cable (Optional)
Power	

DIMENSIONS

UNIT:MM

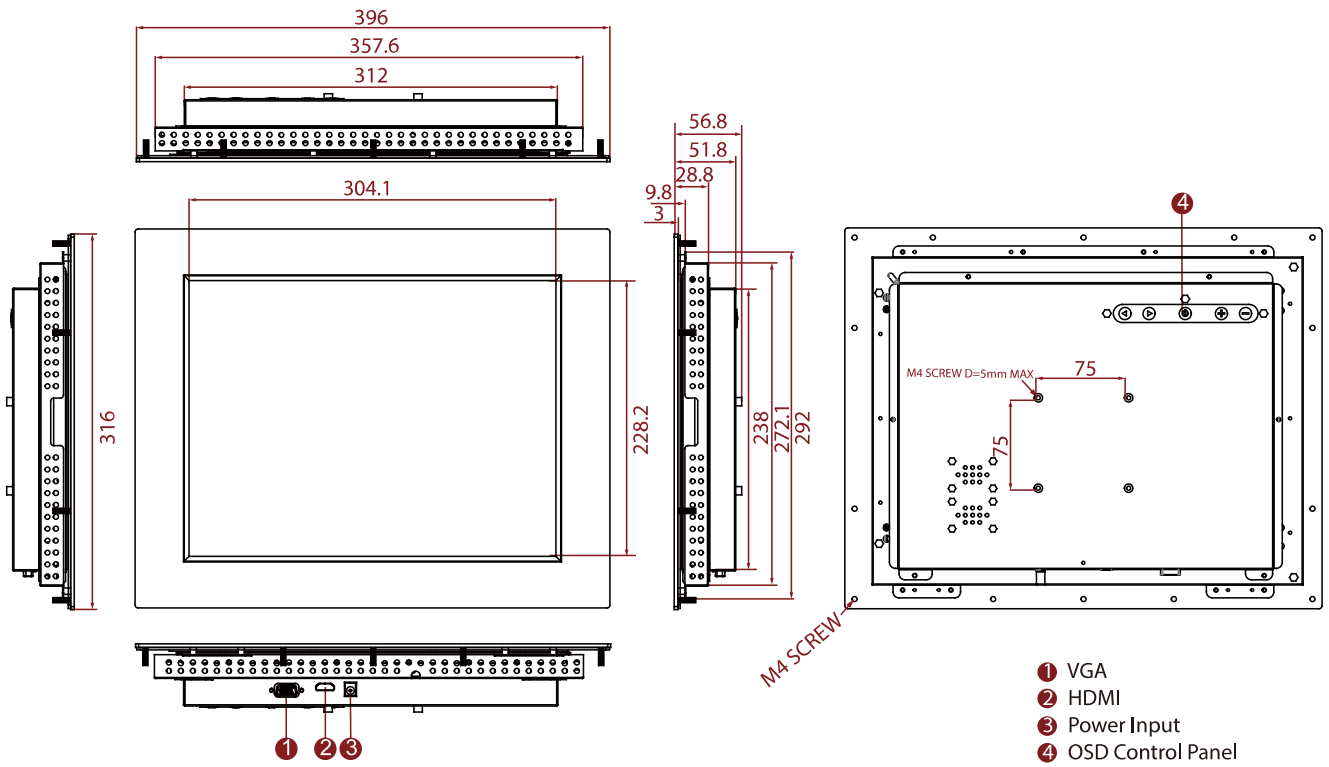

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.