

# R19IB7T-POM1

## 19" Intel® Celeron® N2930 PO Series HMI Panel PC



### KEY FEATURES

- 19" 1280 x 1024, 250 nits
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz
- Slim-line design in open-frame housing
- Multi-touch PCAP flat design
- 12 V DC IN with power jack
- Suitable for KIOSK applications



### SPECIFICATIONS

Display				
<b>Resolution</b>	1280x1024	<b>Size</b>	19 inches	
<b>Contrast Ratio</b>	1000:1	<b>Panel Brightness</b>	250 nits	
<b>View Angles</b>	85,85,80,80	<b>Active Area</b>	376.32x301.06 mm	
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen			
System Specification				
<b>Processor</b>	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	<b>Memory</b>	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)	
<b>Storage</b>	1 x mSATA SSD 64GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)	<b>Ethernet controller</b>	2 x Intel® Ethernet Controller I210-AT	
<b>Operating System</b>	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)	<b>WLAN</b>	Support (Optional)	
<b>BT</b>	Support (Optional)			
Mechanical				
<b>Dimension</b>	457 x 382 x 71 mm	<b>Mounting</b>	Open Frame panel mount VESA Mount	
<b>Enclosure</b>	Metal Housing		<b>Cooling System</b>	Fanless design
Environment				
<b>Operating Humidity</b>	10% to 90% (non-condensing)	<b>Operating Temperature</b>	0~50°C	
<b>Storage Temperature</b>	-10~60°C			
Certification				
<b>Certification</b>	CE, FCC			
IO Ports				
<b>Power Input</b>	1 x 12V DC, Din4 pin connector	<b>USB Port</b>	1 x USB3.0 (Type-A) 3 x USB2.0 (Type-A)	
<b>Serial Port</b>	1 x RS232/422/485 (Default RS232) 2 x RS232  1 x RS232 (Optional)	<b>Video</b>	1 x VGA	
<b>Audio</b>	Mic in	<b>Expansion Port</b>	2 x mPCIe slot	


	Line in Line out		
<b>LAN</b>	2 x Giga LAN RJ45 Connector	<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for storage
<b>Brightness Knob</b>	1 x Brightness Adjustment Knob	<b>PS/2</b>	2 x PS/2
<b>mini PCIe</b>	3 x Mini PCIe		

<b>Control</b>	
<b>Button</b>	1 x Power Button 1 x Reset Button

<b>Accessory</b>	100~240V AC to DC Adapter Power Cord Driver CD & Manual VESA screws
------------------	--

<b>Power</b>	
<b>Power Rating</b>	12V DC <b>Adapter</b> 12V 84W

## DIMENSIONS UNIT:MM

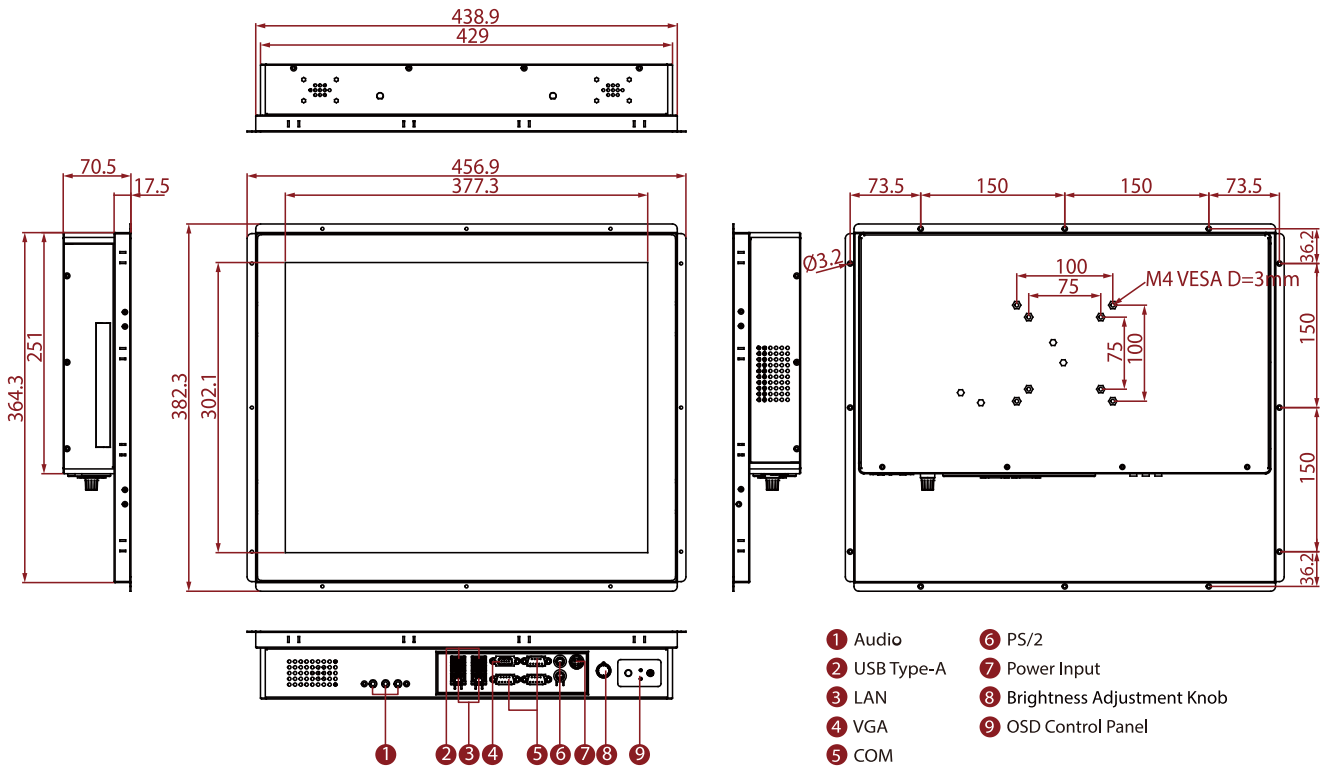

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.