

# W15RK3S-EHA4

## 15.6" ARM A72+A53 E Series HMI Panel PC



### KEY FEATURES

- 15.6" 1920 x 1080 Resolution with Projected Capacitive Multi-Touch (PCAP)
- ARM® Dual-core A72 up to 2.0 GHz + Quad-core A53 up to 1.5 GHz
- Fanless cooling system and ultra-low power consumption
- Front IP65 Water and Dust Proof
- 1 x USB 3.0, 1 x USB 2.0; 1 x RS232/422/485; 1 x RJ45; 1 x Micro SD Slot; 1 x Micro HDMI; 1 x USB OTG
- Supports PoE function




### SPECIFICATIONS

System Specification			
<b>Processor</b>	ARM A72 (up to 2.0 GHz) + ARM A53 (up to 1.5 GHz)	<b>Memory</b>	2GB LPDDR3L 1600 4GB (Optional)
<b>Storage</b>	Onboard 16GB eMMC Onboard 32GB eMMC (Optional) Micro SD Card SDHC (Optional)	<b>Operating System</b>	Android 7.1
<b>WLAN</b>	Support (Optional)	<b>BT</b>	Support (Optional)
Display			
<b>Resolution</b>	1920x1080	<b>Size</b>	15.6 inches
<b>Contrast Ratio</b>	800:1	<b>Panel Brightness</b>	300 nits
<b>View Angles</b>	85,85,85,85	<b>Active Area</b>	344.16×193.59 mm
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen		
Mechanical			
<b>Dimension</b>	388 x 260 x 58 mm	<b>Mounting</b>	Panel mount
<b>Enclosure</b>	Metal Housing	<b>Cooling System</b>	Fanless design
<b>Cut out</b>	371x224mm		
Environment			
<b>Operating Humidity</b>	10% to 90% (non-condensing)	<b>Operating Temperature</b>	0~50°C
<b>Storage Temperature</b>	-20~60°C	<b>IP rating</b>	Front IP65
Certification			
<b>Certification</b>	CE, FCC		
IO Ports			
<b>Power Input</b>	1 x 12V DC, 3-Pin Terminal Block	<b>USB Port</b>	1 x USB3.0 (Type-A) 1 x USB2.0 (Type-A) 1 x USB OTG
<b>Serial Port</b>	1 x RS232/422/485 (Default RS232)	<b>SD Card Slot</b>	1 x Micro SD card slot
<b>Video</b>	1 x Micro HDMI (Optional)	<b>Expansion Port</b>	1 x M.2 slot(1 for WiFi)
<b>LAN</b>	1 x LAN RJ45 Connector with PoE(PD, 802.3 at)		
Accessory			

**Accessory** 100~240V AC to DC Adapter  
 Power Cord  
 VESA screws  
 Manual  
 Mounting clips

Power			
Power Rating	12V DC	Adapter	12V 50W

**DIMENSIONS** UNIT:MM

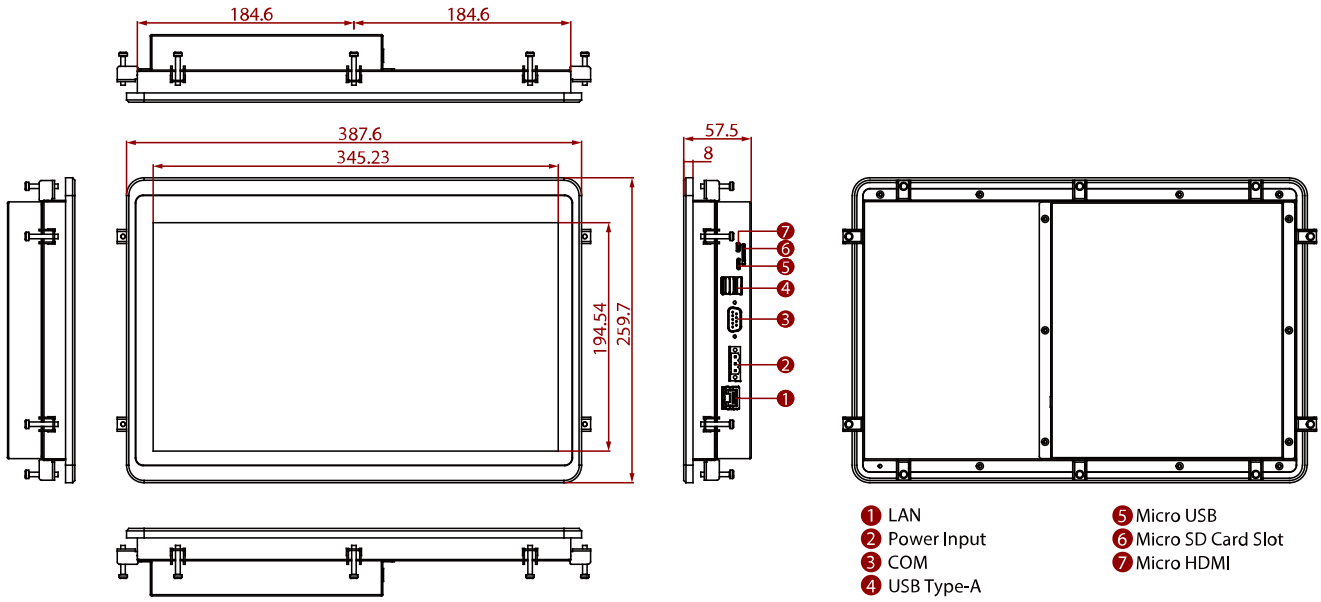

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.