

W22L100-SDA3

21.5" SDI Chassis Display



KEY FEATURES

- 21.5", 1920 x 1080
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount




SPECIFICATIONS

| Display | |
|------------------------------|---|
| Resolution | 1920x1080 |
| Contrast Ratio | 4000:1 |
| Display Color | 16.7M Colors |
| Active Area | 698.4 x 392.85 mm |
| Size | 32.0 inches |
| Panel Brightness | 400 nits |
| View Angles | 89,89,89,89 |
| Touch / Glass | Projected Capacitive Multi Touch Screen |
| Environment | |
| Operating Humidity | 10% to 90% (non-condensing) |
| Storage Temperature | -10~60°C |
| Operating Temperature | 0~50°C |
| Certification | |
| Certification | CE, FCC |
| IO Ports | |
| USB Port | 1 x USB for Touch Screen |
| Audio | 2 x Speaker (Optional) |
| Video | 1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional) |
| Mechanical | |
| Dimension | 518.1 x 314 x 38.5 mm |
| Enclosure | Metal |
| Mounting | VESA Mount |
| Cooling System | Fanless Design |
| Accessory | |
| Accessory | User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable |
| Power | |
| Power Rating | 12V DC input |

Control

| | |
|---------------|--|
| Button | 8 key: Power Up Down Menu/Enter Left Right Exit Auto |
|---------------|--|

DIMENSIONS UNIT:MM

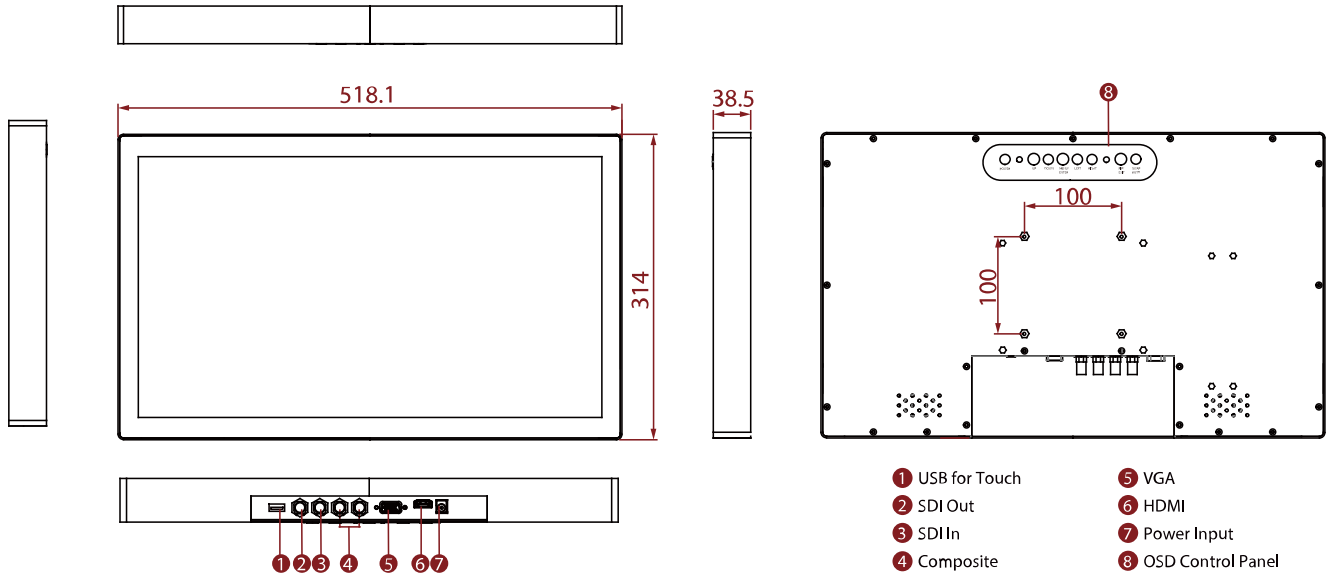

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.